

SPEAKMAN COMPANY

SE-597 Installation, Maintenance & Operation Instructions

DESCRIPTION

Portable body wash. Supplied with stainless steel tank, pressure gauge, air filler, pressure relief valve, and drench hose activated by squeeze handle with non-aerated spray nozzle, and dust cover.

SPECIFICATIONS

TANK: 5 Gallon Stainless Steel.

DRENCH HOSE:

VALVE: 3/8" NPT Female Brass, Chrome-Plated.

HOSE: 6' Reinforced, 750 PSI Burst Pressure, Hose Clip for Valve.

SPRAYHEAD: Yellow Plastic Spray Outlet w/ Flip Top Dust Cap and an Automatic Flow Control.

SHIPPING WEIGHT: 13 lb.

INSTALLATION

Failure to use potable water can result in emergency units producing impure or contaminated water causing possible further injury. Fill tank with 4 gallons of water, and pressurize tank with 100 psi air.

OPERATION

The drench hose is activated by applying pressure to the valve handle. The self-closing valve will open and an aerated flow of water will discharge from the outlet. Water will continue to flow as long as the handle is depressed. Once pressure on the handle is released, the valve will immediately shut off.

TESTING PROGRAM


The American National Standards Institute (ANSI) states that all safety emergency equipment shall be activated on a weekly basis to flush the line and verify proper operation. Speakman Company furnishes a testing record tag (91-0635) with each unit. On this tag the date of inspection and the inspector's initials should be noted.

MAINTENANCE

The valve and the spray head are the only portions of the unit that may require maintenance. Should you need parts to repair this unit, please reference the parts listing below for correct part numbers? Before any maintenance is done **be sure to relieve the water pressure in the tank.**

Replace the water and clean the Tank at least once a month. To clean the tank, Drain the water through the hand held drench Hose. Refill as instructed in the operation section.

WARNING: Use only genuine Speakman parts when repairing or replacing components. To order parts call 1-800-537-2107.

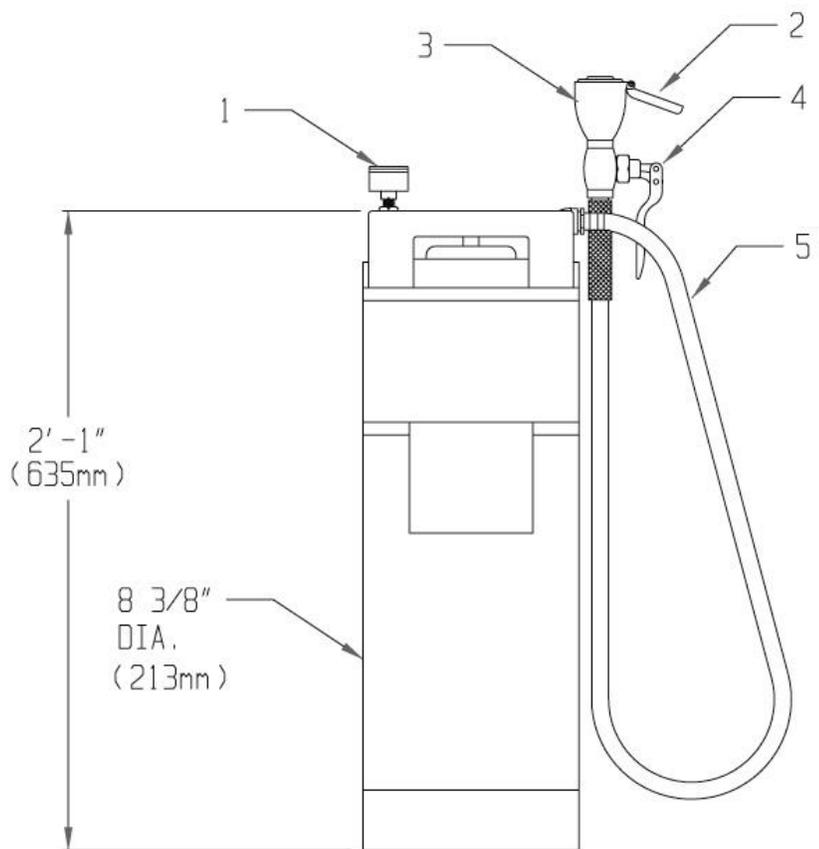

SE-597 REPLACEMENT/REPAIR PARTS

<u>ITEM</u>	<u>PART/GROUP #</u>	<u>DESCRIPTION</u>
1	RPG05-1671	Pressure Gage
2	RPG07-0104	Dust Cap
3	RPG38-0422	Sprayhead Assembly
4	RPG20-2020	3/8" Self-Closing Valve
5	RPG63-0064	Hose Assembly

FLOW DATA

Body Spray:

FLOW RATE GPM (LPM)	.75(2.83) for 7 minutes.
---------------------	--------------------------

SPEAKMAN[®]
PO Box 191 Wilmington, DE 19899 Phone: 800-537-2107 Fax: 800-977-2747
Visit us on the web at www.speakmancompany.com