

Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl

SPECIFICATION



FEATURES:

- 8 in. diameter yellow plastic showerhead
- Internal 20 gpm regulator flow control
- 1 in. NPT female brass, chrome plated full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- Stanchion is 1 ¼ in. galvanized steel piping with brass fittings
- 1 ¼ in. NPT female waste & inlet
- Stainless steel finish
- 20 gpm @ 30 psi flowing

EYE/FACE WASH: SE-400

- (6) chrome plated aerators, plastic covered brass bodies
- Stainless steel bowl
- ½ in. NPT female brass chrome plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 9.3 gpm @ 30 psi
- Universal emergency sign included

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

FINISHES:

- DuraJade™ powder-coated galvanized steel (standard)

OPTIONS:

- Stainless steel cover -CV
- Anti-freeze protection valve -FPV
- Hand & foot operation -HFO
- Hand-held spray -HS
- Self-closing shower valve with chain & ring -SCSV
- Stainless steel pull rod -SPR
- Anti-scald protection valve -SPV
- Substituting a 1 in. IPS stainless steel ball valve -SSBV1
- Substituting a ½ in. IPS stainless steel ball valve -SSBV2
- Substituting of stainless steel showerhead for standard plastic head -SSH

WARRANTY:

- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: FEBRUARY 2015

Management Systems
Registered to ISO 9001



SPEAKMAN®

Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl SE-603

SPECIFICATION

SHOWER FLOW DATA			
PRESSURE		FLOW RATE	
psi	bar	gpm	L/min
30	2.07	20	75
90	4.14	25	94

EYE/FACE WASH FLOW DATA			
PRESSURE		FLOW RATE	
psi	bar	gpm	L/min
30	2.07	9.55	36.6

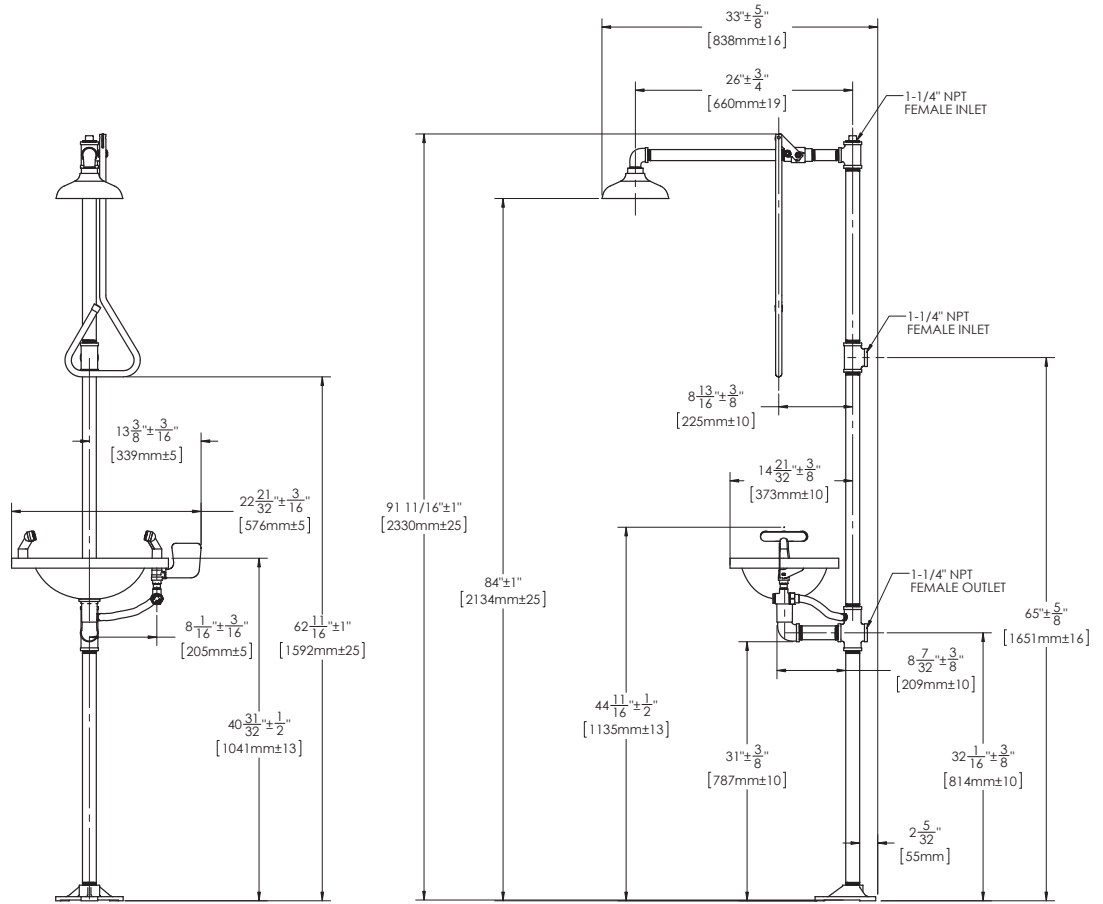

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. All units meet existing ANSI/ISEA Z358.1 standards and OSHA rules. Product improvements may cause specification and dimensional changes without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
 P: 800-537-2107 | F: 800-977-2747
 WWW.SPEAKMANCOMPANY.COM

Management Systems
 Registered to ISO 9001

REVISION DATE: FEBRUARY 2015