

Stainless Steel Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl

SPECIFICATION



FEATURES:

- 8 in. diameter yellow plastic showerhead
- Internal 20 gpm flow control
- 1" NPT female brass, stainless steel full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- 1 ¼" stainless steel 18 gauge tubing stanchion
- 1 ¼" NPT male inlet & waste
- 20 @ 30 psi

EYE/FACE WASH: SE-400

- (6) chrome plated aerators, plastic covered brass bodies
- Stainless steel bowl
- ½ in. NPT female brass chrome plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 9.3 gpm @ 30 psi
- Universal emergency sign included

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

FINISHES:

- DuraJade™ powder-coated galvanized steel (standard)

OPTIONS:

- | | |
|--|---------------------------------|
| • Stainless steel cover | <input type="checkbox"/> -CV |
| • Anti-freeze protection valve | <input type="checkbox"/> -FPV |
| • Hand & foot operation | <input type="checkbox"/> -HFO |
| • Hand-held spray | <input type="checkbox"/> -HS |
| • Self-closing shower valve with chain & ring | <input type="checkbox"/> -SCSV |
| • Stainless steel pull rod | <input type="checkbox"/> -SPR |
| • Anti-scald protection valve | <input type="checkbox"/> -SPV |
| • Substituting a 1 in. IPS stainless steel ball valve | <input type="checkbox"/> -SSBV1 |
| • Substituting a ½ in. IPS stainless steel ball valve | <input type="checkbox"/> -SSBV2 |
| • Substituting of stainless steel showerhead for standard plastic head | <input type="checkbox"/> -SSH |

WARRANTY:

- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM


REVISION DATE: JANUARY 2015

Management Systems
Registered to ISO 9001

SPEAKMAN®

Stainless Steel Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl SE-623

SPECIFICATION

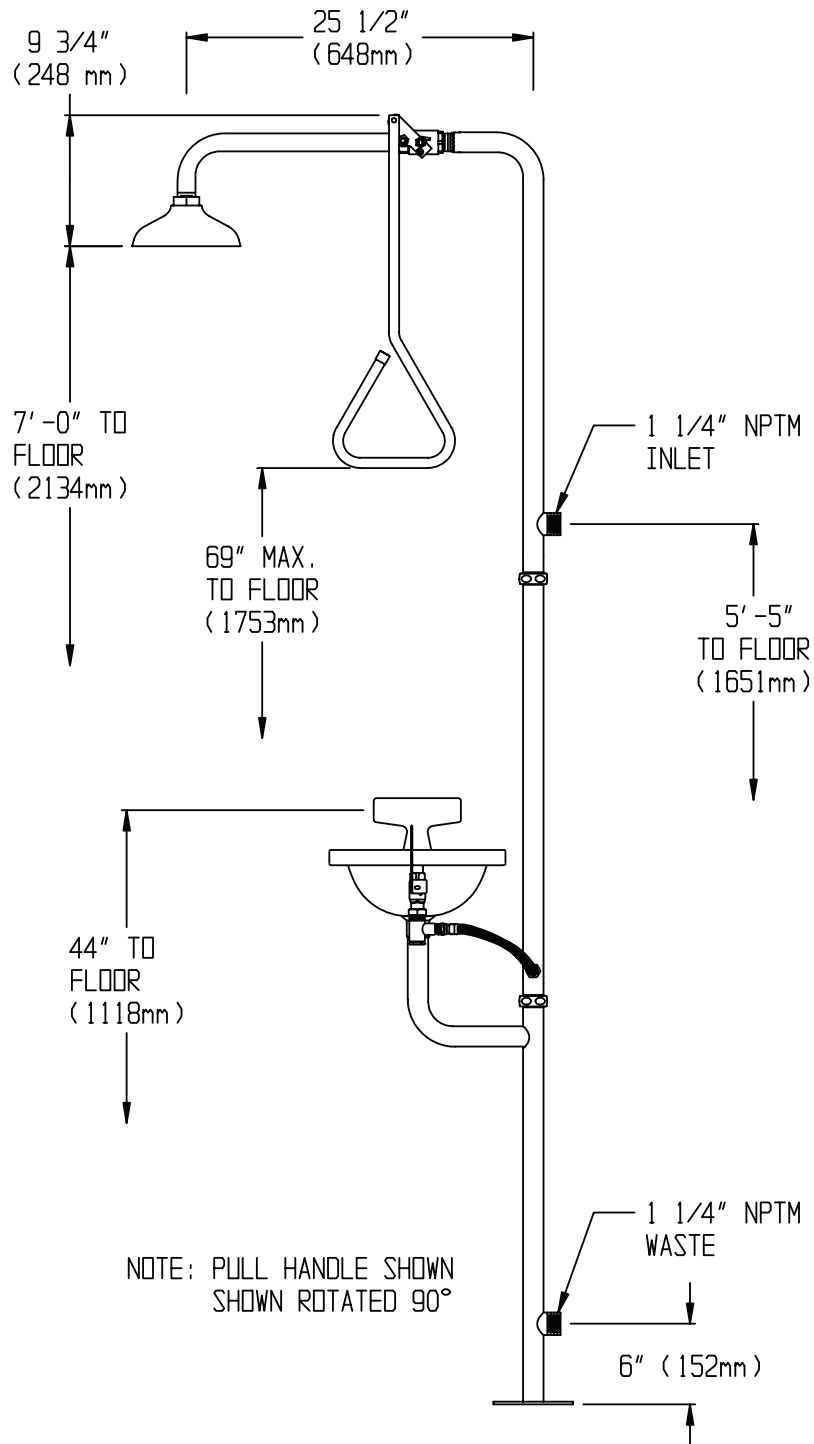

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

Management Systems
Registered to ISO 9001

REVISION DATE: JANUARY 2015