


# PROTECT WITH DENTEC

## SELF RETRACTING DEVICES

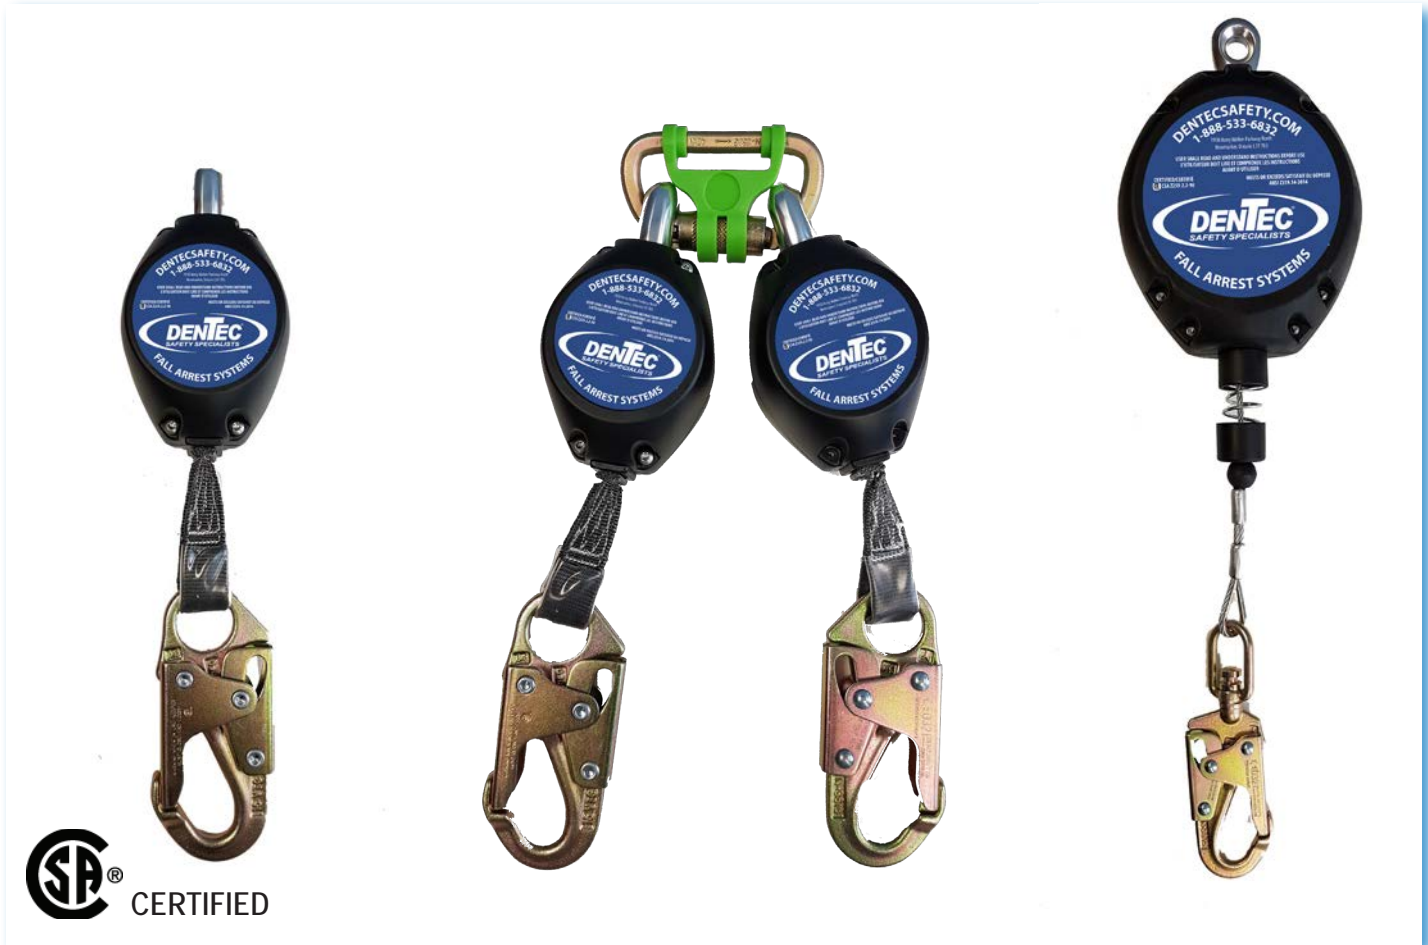

Dentec Self-Retracting Devices are components in a complete personal fall arrest system designed for use in applications where workers require mobility at heights (ie: construction work, oil production, etc.). Self-Retracting Devices: Are suitable for overhead anchorage (ie: from directly above the user's head to as low as the dorsal d-ring on the user's full body harness. Dentec Self-Retracting Devices are CSA certified.

- Swivel Top
- Individually Serialized - Easily Visible
- Thermoplastic Housing
- Internal Shock Absorbing System
- Built-in Reserve Line
- Sewn-in Fall Indicator
- Multiple Options For Connectors
- Capacity : 130lbs. - 308 lbs. (59kg -140kg)
- Maximum Arrest Distance : 47 in. (1200mm)
- Maximum Arrest Force : 1,800 lbs. (8kN)

Part #	Description	Material	SRL Type	
16SRL007215	7' Web SRL	1" (2.54cm) UHMWPE Web	1	1.5m - 3m
16SRL007215TWIN	7' Web SRL Twin Pack	1" (2.54cm) UHMWPE Web	1	1.5m - 3m
16SRL0112115	11' (3.35m) Web SRL	1" (2.54cm) UHMWPE Web	2	Greater than 3m
16SRL0201115	20' (6.09m) Cable SRL	3/16" (4.76mm) Galvanized Cable	2	Greater than 3m
16SRL0301115	30' (9.14m) Cable SRL	3/16" (4.76mm) Galvanized Cable	2	Greater than 3m
16SRL0501115	50' (15.24m) Cable SRL	3/16" (4.76mm) Galvanized Cable	2	Greater than 3m

# PROTECT WITH DENTEC

## LEADING EDGE SELF RETRACTING DEVICES



Dentec Self-Retracting Devices are components in a complete personal fall arrest system designed for use in applications where workers require mobility at heights (ie: construction work, oil production, etc.). Leading Edge Self-Retracting Devices: Are suitable for applications where the lifeline remains generally horizontal during use, and free fall is limited to 1.5 m (5 ft). Leading Edge refers to unprotected and potentially sharp edges of roofs, doors, decking, etc. These units have an integrally attached shock absorber, which minimizes fall arrest forces on the user and withstands impact loading of the lifeline over sharp or abrasive edges during a fall event. Dentec Leading Edge Self-Retracting Devices are CSA certified.

- Aluminum Swivel Top
- Individually Serialized - Easily Visible
- Internal Shock Absorbing System
- Thermoplastic Housing
- Built-in Reserve Line
- Integrated Energy Absorber Foot Level Tie-off
- Multiple Options For Connectors
- Swivel Connector with Fall Indicator
- Capacity : 130lbs. - 310 lbs. (59kg -140kg)
- Maximum Arrest Distance : 42 in. (1.4 M)
- Maximum Arrest Force : 1,350 lbs. (6kN)

Part #	Description	Material	LE SRL Type	
16SRLLE0201115	20' (6.09m) Cable SRL	3/16" (4.76mm) Galvanized Steel Cable	Type 2	Greater than 3m
16SRLLE0301115	30' (9.14m) Cable SRL	3/16" (4.76mm) Galvanized Steel Cable	Type 2	Greater than 3m
16SRLLE0501115	50' (15.24m) Cable SRL	3/16" (4.76mm) Galvanized Steel Cable	Type 2	Greater than 3m